

## AIR ELIMINATORS FOR WATER SYSTEMS AE32 (Carbon Steel)

### DESCRIPTION

The AE32 carbon steel air eliminators remove air from hot and superheated water systems and is also suitable for all liquids compatible with the construction, providing that their specific weight is no less than 0,75 kg/dm<sup>3</sup>.

This ball float type automatic air eliminator can be used in combination with other air elimination and separation systems or directly applied at high points in the piping.

Connections are female screwed or flanged.



### MAIN FEATURES

Corrosion-resistant working parts.

Replaceable internal parts.

**OPTIONS:** Internal strainer (only on horizontal models).

**USE:** Cold, hot and superheated water systems or other liquids compatible with the construction.

**AVAILABLE MODELS:** AE32-17.

**SIZES:** 1"; DN 25.

**CONNECTIONS:** Female screwed ISO 7/1Rp(BS21).  
Flanged EN 1092 -1 or ANSI.  
Special flanges upon request.

**INSTALLATION:** Horizontal or vertical installation (on request).  
It must be installed with the float lever in an horizontal plane, so that it rises and falls vertically. It should be installed at the points in the plant where the air tends to collect.  
The drain should be piped to a safe position.

APPLICATION LIMITS	
Min. liquid specific weight	0,75 kg/dm <sup>3</sup>
Max. working diff. press. – AE32-17	17 bar

CE MARKING – GROUP 2 (PED – European Directive)	
PN40	Category
1" – DN 25	1 (CE marked)

BODY LIMITING CONDITIONS		
FLANGED PN40 / ANSI 300 lb *	FLANGED ANSI 150 lb**	RELATED TEMP.
ALLOW. PRESS.	ALLOW. PRESS.	
37,1 bar	17,7 bar	100 °C
33,3 bar	14 bar	200 °C
30,4 bar	12,1 bar	250 °C
27,6 bar	10,2 bar	300 °C

PMO – Max. operating press. 32 bar;

TMO – Max. operating temp. 200 °C;

\* According to EN1092-1:2018; \*\* According to EN1759-1:2004;  
Body limiting conditions PN40 or below, depending on the type of connections adopted. Rating PN40 for thread, SW and BW.

FLOW RATE CAPACITY (kg/h)										
MODEL	SIZE	DIFFERENTIAL PRESSURE (bar)								
		0,5	1	2	4	6	8	10	13	17
AE32-17	1" – DN 25	75	120	240	420	535	720	870	1200	1380


Capacities at a standard atmospheric pressure of 1bar and 20°C.

If the temperature differs from 15°C, the discharge capacity can be corrected by multiplying it by:  $\frac{288}{273 + T}$ ,  
where T is the actual temperature in °C.

**DIMENSIONS (mm)**


Screwed							PN16/40			PN16/40 *			ANSI 150 lb			ANSI 150 lb *			ANSI 300 lb			ANSI 300 lb *		
SIZE	A	B	C	D	E	WT. (kg)	F	G	WT. (kg)	F	B	WT. (kg)	F	G	WT. (kg)	F	B	WT. (kg)	F	G	WT. (kg)	F	B	WT. (kg)
1"–DN25	120	195	80	190	110	9	160	248	11,3	230	195	12	160	248	11	230	195	11,2	160	248	11,3	230	195	12,8

\* Alternative

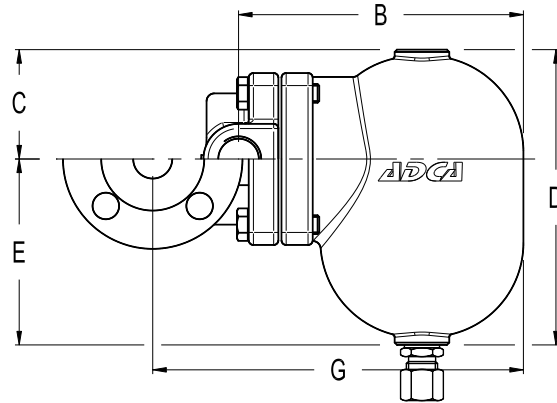

MATERIALS		
POS. N°	DESIGNATION	MATERIAL
1	Body	GP240GH / 1.0619
2	Cover	GP240GH / 1.0619
3	* Gasket	Stainless steel / Graphite
4	* Seat	AISI 410 / 1.4006
5	* Valve	AISI 410 / 1.4006
6	* Lever	AISI 304 / 1.4301
7	* Float	AISI 304 / 1.4301
8	Compression fitting	Fe/Zn 12 – ISO 2081
9	Bolts	Steel 8.8

\* Available spare parts.

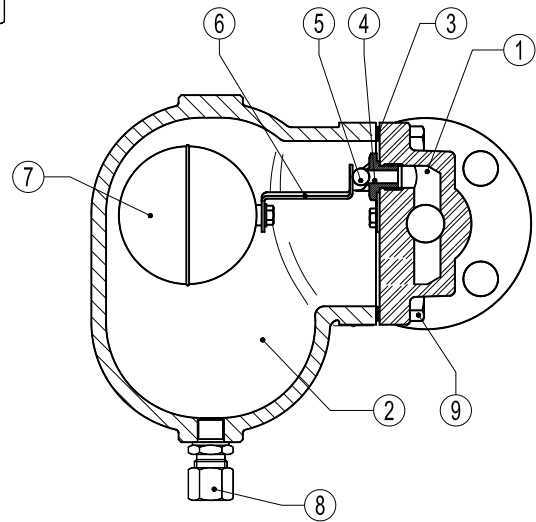

**TYPICAL INSTALLATION**

