

HYGIENIC BALL VALVES M3H TRUE BORE (DN 10 – 50 DIN)

DESCRIPTION

M3H three pieces body ball valves are isolating valves designed for use with clean steam, condensate and other gases and liquids used in high purity and aseptic processes.

The valve is not designed as a control valve and should only be used as an isolating valve, fully open or fully closed.

The product is mainly designed for the pharmaceutical, biotech, semiconductor, cosmetics, fine chemical, food and beverage industries.

MAIN FEATURES

True bore floating ball design.

A351 CF3M body and ends with ferrite content of less than 2% and low sulphur between 0,005 and 0,017%.

Can be serviced without removal from pipeline.

Bidirectional.

Anti blow out proof stem.

ISO 5211 mounting.

STANDARD SURFACE FINISH

Internal wetted parts: $\leq 0,51$ micron Ra – SF1.

External: as casted.

Ultrasonic cleaning.

OPTIONS:

- Antistatic device.
- Different sealing materials.
- Degreased for oxygen use.
- Tube weld with loose body flanges (360° rotation after installation).
- Cavity filler.

USE:

Clean steam, gases and liquids compatible with the construction.

AVAILABLE MODELS:

M3H – Investment casting.

SIZES:

DN 10 to DN 50.

CONNECTIONS:

- According to DIN 11850 tube.
- TC – Sanitary clamps DIN 32676.
- ETO – Extended tube orbital welding.
- TC / ETO – Combination.

PACKAGING:


Assembling and packaging in a clean room certified according to ISO 14644-1. The product is end capped and sealed with recyclable thermo-shrinkable plastic film to avoid contamination.

INSTALLATION:

See IMI, installation and maintenance instructions.



CE MARKING (PED – European Directive)		
PN100	PN64	Category
DN 10 to 20	–	SEP
–	DN 25 to 32	SEP
–	DN 40 to 50	1 (CE Marked)

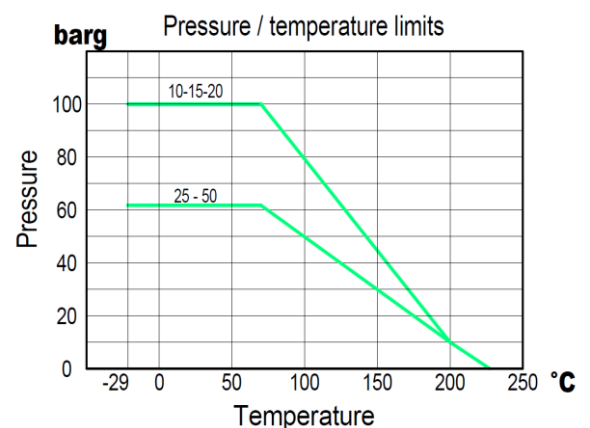

Working pressure may be limited by the valve connections.



MATERIALS		
POS. Nº	DESIGNATION	MATERIAL
1	Valve body	CF3M / 1.4409
2	TC end connection	CF3M / 1.4409
3	Tube weld end connection	CF3M / 1.4409 (integral)
3	Tube weld end connection	AISI 316L / 1.4404 (360° rotation)
4	*** Flange	CF3M / 1.4409
5	Stem	AISI 316L / 1.4404
6	* Valve ball	AISI 316L / 1.4404
7	* Standard seat	TFM 1600
8	* Cavity filler seat	TFM 1600
9	Body seal	PTFE
10	* Stem seals	TFM 1600
11	* Spacer	AISI 316 / 1.4401
12	Handle	AISI 304 / 1.4301
13	Handle end	Vinyl
14	* Spring washers	AISI 304 / 1.4301
15	Compression nut	AISI 304 / 1.4301
16	* Lock washer	AISI 304 / 1.4301
17	Fixing bolt	AISI 304 / 1.4301
18	Stop pin	AISI 304 / 1.4301
19	** Antistatic device	AISI 316 / 1.4401
20	* O-ring	Viton

* Available spare parts; ** On request.

*** Loose flange only applied on the 360° rotation optional version.





FDA / USP Class VI seals certificate on request.

All valves have a serial number. In case of non standard valves this number must be supplied if spare parts are ordered.

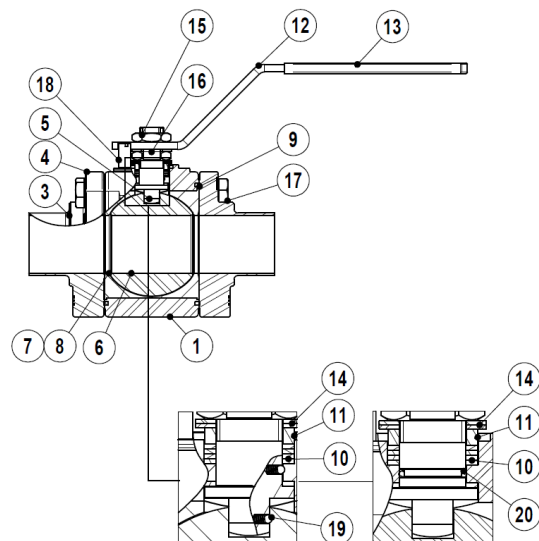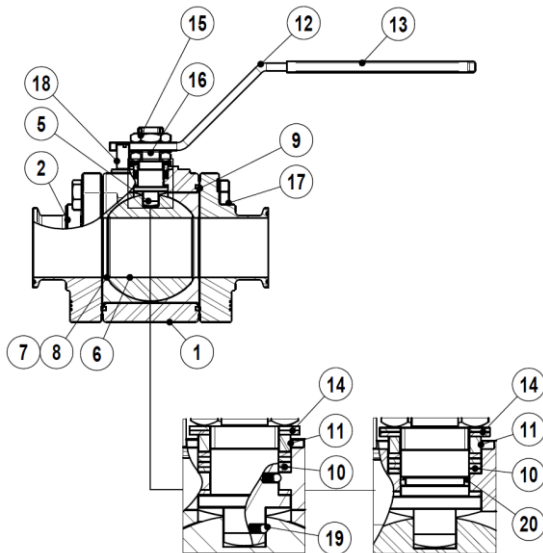


DIMENSIONS (mm) DIN

SIZE DN	A ₁	A ₂	A ₃	A _{3.1}	A _{3.2}	B	C	D	E	ØF	ØG	ØH	I	BALL PORT	ISO 5211	WGT. (kg)
10	90	102	96	45	51	42	21	65	150	34	13	10	25	10	F03	0,73
15	100	114	107	50	57	50	25	69	150	34	19	16	27	16	F03	1,49
20	115	127	121,5	57,5	64	62	31	87	175	34	23	20	27	20	F04	1,94
25	125	135	130,5	62,5	68	72	36	92	175	50,5	29	26	27	26	F04	2,62
32	140	153	147	71	76	85	42,5	114	207	50,5	35	32	27	32	F05	4,41
40	150	161	155	75	80	95	47,5	119	207	50,5	41	38	27	38	F05	5,5
50	165	178	172	82	90	105	52,5	124	232	64	53	50	28	50	F05	7

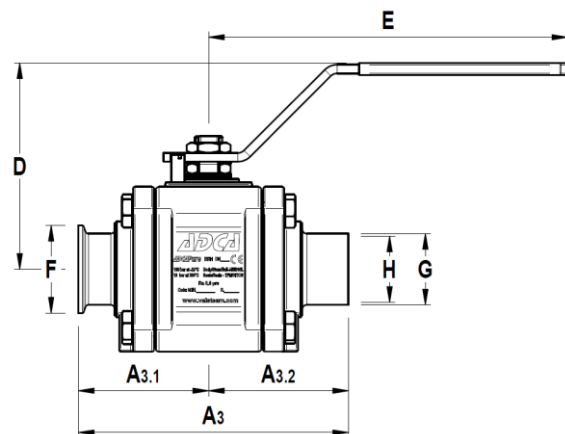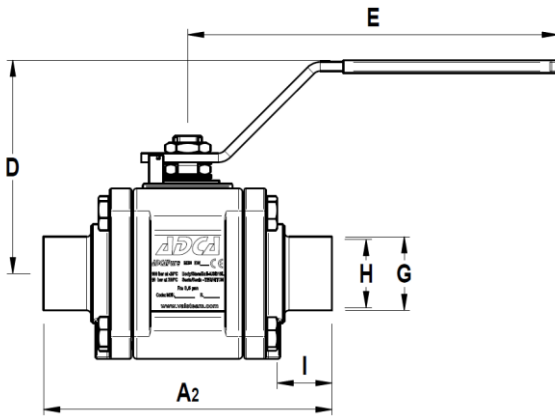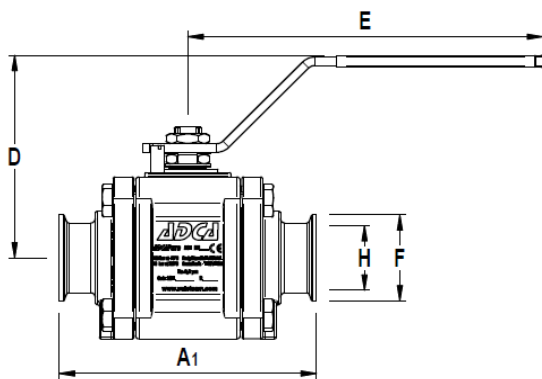

Tube weld easy and quick installation - optional

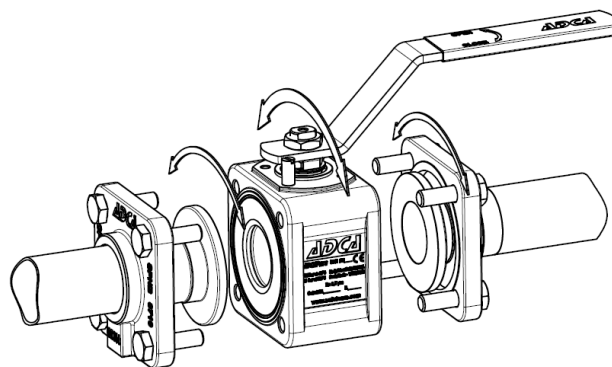

Loose body flanges make it possible to install the valve without aligning of welded end connections. After installation the valve can rotate on 360° for the desired orientation.

ORDERING CODES M3H											
Valve model		MH	.			F	F			CD	50
M3H 3 pieces ball valve CF3M		MH									
Lever handle											
Flat lever handle stainless steel / plastic cover											(*)
Flat lever handle stainless steel / plastic cover w/ lockable system											3
Bare stem											9
Material											
CF3M / 1.4409											(*)
Seat design											
Standard seats											(*)
Cavity fillers						F					
Seat material											
TFM 1600							F				
Surface finish, special services and options											
Standard surface finish (mechanical polishing)											(*)
Electropolishing											1
Oxygen cleaning											2
Antistatic device											
None											(*)
Antistatic device											A
End connections											
TC – Sanitary clamps DIN 32676										CD	
ETO – Extended tube orbital welding DIN 11850 (integral, no rotation design)										ITD	
ETO – Extended tube orbital welding DIN 11850 (360° rotation design)										TD	
TC / ETO – Combination DIN (integral, no rotation design)										CITD	
TC / ETO – Combination DIN (360° rotation design)										CTD	
Ball port											
True bore (standard)											(*)
Full bore											NA
Size											
DN 10											10
DN 15											15
DN 20											20
DN 25											25
DN 32											32
DN 40											40
DN 50											50
Special valves / Extras											
Full description or additional codes have to be added in case of a non standard combination											E

(*) Omitted if a standard valve is requested.
 NA – Not available.