

SANITARY PRESSURE REDUCING VALVE In-line design P173

DESCRIPTION

The ADCA P173 series direct acting, spring-loaded diaphragm sensing, pressure reducing valves are designed for use with clean steam, compressed air, water and other gases or liquids compatible with the construction materials.

MAIN FEATURES

Compact in-line design.
Completely machined from bar stock material, no castings or forgings are used on the standard version.
No rising stem.

STANDARD SURFACE FINISH

Internal wetted parts: $\leq 0,51$ micron Ra – SF1.
External: $\leq 0,76$ micron Ra – SF3.
Other surface conditions see IS PV20.00 E – Technical information.
Ultrasonic cleaning.

OPTIONS:

Leakage line connection 1/8" (captured vent).
Different soft valves for liquids and gases.
Lock system, allows clean-in-place (CIP) and sterilization-in-place (SIP) operations with valve in line.
Gauge connection on body.
With or without bottom drain connection.

USE:

Clean steam, compressed air, water and other gases and liquids compatible with the construction.

AVAILABLE

MODELS: P173.
SIZES: 1 1/2", 2" ; DN 32 to DN 50.
OUTLET SPRING RANGES: 0,8 – 1,5 bar; 1 – 3 bar; 1,5 – 5 bar.

CONNECTIONS:

Sanitary clamps or others on request.

PACKAGING:

Assembling and packaging in a clean room certified according to ISO 14644-1.
The product is end capped and sealed with recyclable thermo-shrinkable plastic film, to avoid contamination.

INSTALLATION:

Horizontal installation.

ORDER

REQUIREMENTS: Type of fluid.
Maximum operating temperature.
Inlet pressure and required outlet pressure.
Capacity (maximum and minimum).



LIMITING CONDITIONS

Valve model	P173
Body design conditions	PN16
Max. upstream pressure	8 bar 4 bar*
Max. downstream pressure	5 bar
Min. downstream pressure **	0,8 bar
Max. design temperature ***	150 °C

* See capacity table.

** For tight shut off, with regulating spring relaxed, ensure a minimum 0,2 bar downstream pressure.

*** Other on request.

CE MARKING (PED – European Directive)

PN16	Category
1 1/2"; 2"; DN 32 to DN 50	SEP

CAPACITIES									
	BPE			DIN			ISO		
Valve size	11/2"	2"	2" *	40	50	50 *	32	40	50 *
Kvs	5,5	5,5	8,5 *	5,5	5,5	8,5 *	5,5	5,5	NA

* Limited to a maximum 4 bar inlet pressure.

DIMENSIONS (mm) ASME BPE											
SIZE	A *	B	B1	C	D	d1	d2	E	F	H	WGT. (kg)
11/2"	170	113	76	199	130	25	15,75	90	50,5	34,8	9,1
2"	170	119	82	205	130	25	15,75	90	64	47,5	9,3



DIMENSIONS (mm) DIN											
SIZE DN	A *	B	B1	C	D	d1	d2	E	F	H	WGT. (kg)
40	170	113	76	199	130	25	15,75	90	50,5	38	9
50	170	119	82	205	130	25	15,75	90	64	50	9,2

Clamp ferrules DIN 32676 Series A; Tube weld DIN 11866 Series A (DIN 11850 Series 2).


DIMENSIONS (mm) ISO											
SIZE DN	A *	B	B1	C	D	d1	d2	E	F	H	WGT. (kg)
32	170	113	76	199	130	25	15,75	90	64	38,4	9
40	170	119	82	205	130	25	15,75	90	64	44,3	9,4

Clamp ferrules DIN 32676 Series B; Tube weld DIN 11866 Series B (ISO 1127 Series 1).

* Special versions or non-standard sanitary clamp ferrules are available on request, both for the inlet/outlet and pressure gauge connection.

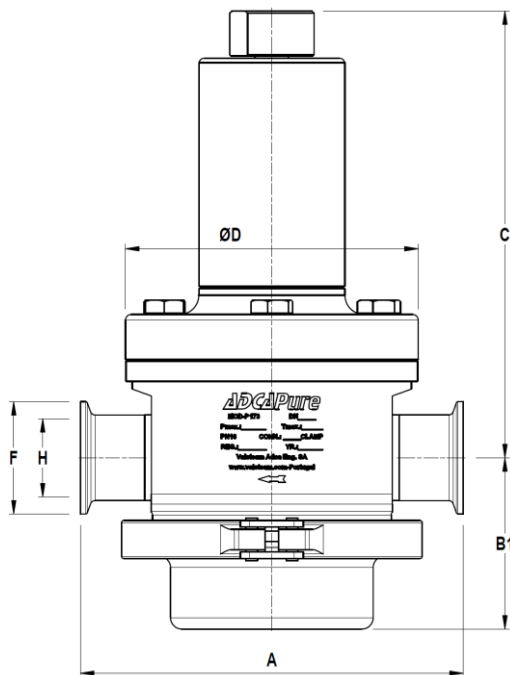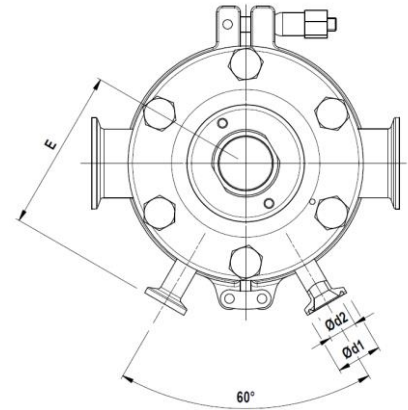

Without bottom connection.

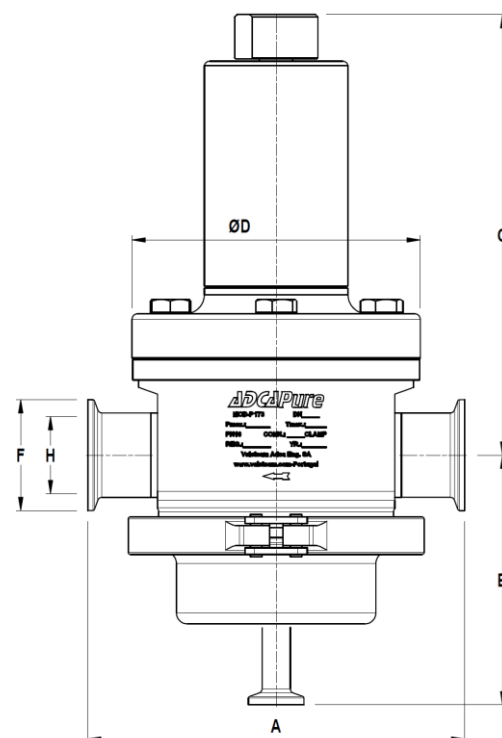

With bottom connection for condensate drainage.



MATERIALS

POS. Nº	DESIGNATION	MATERIAL
1	Valve body	AISI 316L / 1.4404
2	Cover	AISI 316L / 1.4404
2.1	Bottom cover	AISI 316L / 1.4404
2.2	Gasket	PTFE / TFM® Envelope gasket
2.3	Safety clamp	AISI 316 / 1.4401
3	Centering plate	AISI 316L / 1.4404
4	* Valve stem	AISI 316L / 1.4404
5	* Soft plug	EPDM; PTFE **
6	* Valve plug	AISI 316L / 1.4404
7	* Upper diaphragm	EPDM
8	* Lower diaphragm	PTFE (Gylon)
9	Diaphragm plate	AISI 316L / 1.4404
10	* O-ring	EPDM
11	Diaphragm plate	AISI 316L / 1.4404
12	Stem guide	AISI 316 / 1.4401
13	Spring plate	AISI 316 / 1.4401
14	Nut	Stainless steel A2-70
15	Washer	AISI 316 / 1.4401
16	* Adjustment spring	AISI 302 / 1.4300
17	Top spring plate	AISI 316 / 1.4401
18	Retaining washer	Stainless steel A2-70
19	Regulating nut	AISI 316L / 1.4404
20	Adjustment screw	Brass
21	O-ring	NBR
22	Bearing	Corrosion resistant steel
23	Ext. bowed shaft ring	Stainless steel
24	Cover nut	Plastic
25	Bolts	A2


* Available spare parts; ** Others according to fluid.

FDA / USP Class VI seals certificate on request.


Viton diaphragm only with FDA approval (pos. 7).

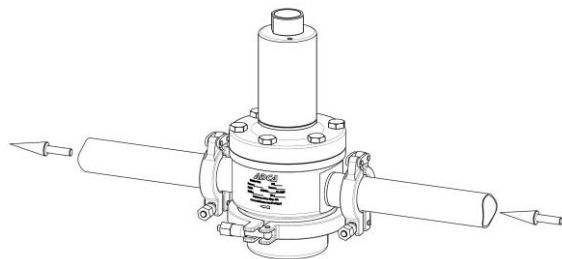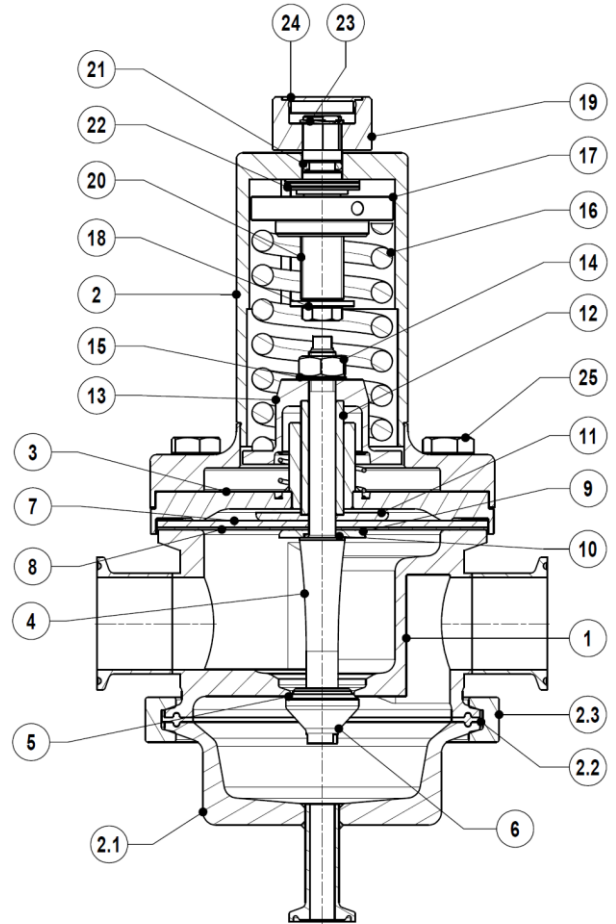

Valve without bottom drain, for clean gases.

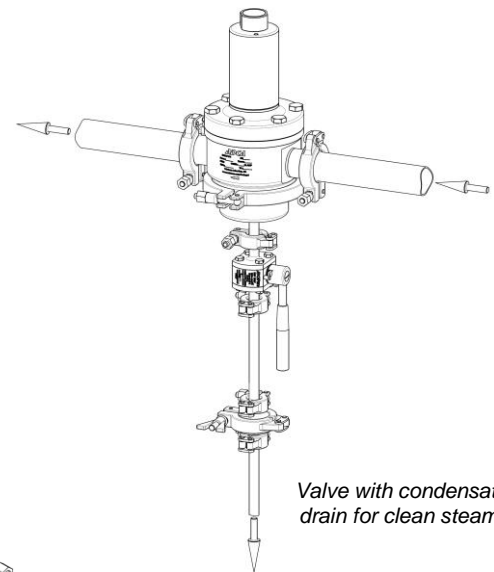

Valve with condensate drain for clean steam.

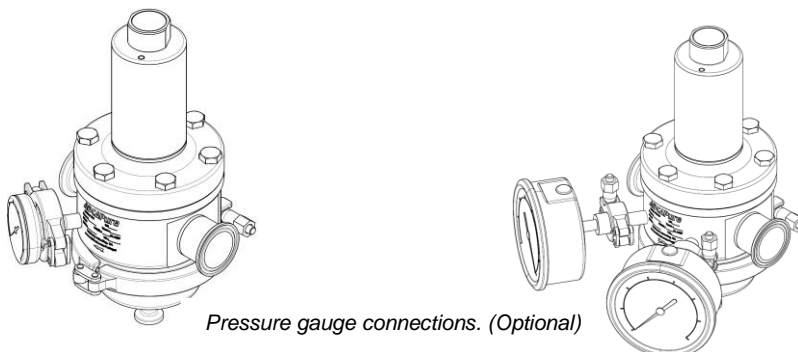

Pressure gauge connections. (Optional)

ORDERING CODES P173

Valve model	P17D	4	4	T	M	I	X	X	X	D	32	E
P173 – AISI 316L / 1.4404 Diaphragm pressure reducing valve with drain	P17D											
P173 – AISI 316L / 1.4404 Diaphragm pressure red. valve without drain	P17											
Outlet spring range												
0,8 to 1,5 bar		4										
1 to 3 bar		5										
1,5 to 5 bar		6										
Flow capacity												
Kvs – 5,5		4										
Kvs – 8,5 (Only available w/ BPE 2" and DIN DN50. Limited to a max. 4 bar inlet press.)		6										
Diaphragm material												
PTFE (Gylon)				T								
Valve head												
Metal to metal (non standard)					M							
EPDM					E							
PTFE					T							
FPM / Viton					V							
Regulating knob, top cap and captured vent												
Stainless steel regulating knob						I						
Top cap (adjusting screw sealing)						T						
Stainless steel regulating knob w/ diaphragm cover leakage connection in case of diaphragm failure						L						
Top cap (adjusting screw sealing) w/ diaphragm cover leakage connection in case of diaphragm failure						U						
Gauge port options												
Without gauge ports							X					
Tri-clamp gauge port on the left side (rel. to the flow direction) – Downstream pressure – 1 connection							7					
Tri-clamp gauge port on the right side (rel. to the flow direction) – Downstream pressure – 1 connection							6					
Tri-clamp gauge port on the left side (rel. to the flow direction) – Upstream and downstream press. – 2 conn. a)							9					
Tri-clamp gauge port on the right side (rel. to the flow direct.) – Upstream and downstream press. – 2 conn. a)							8					
Tri-clamp gauge port on both sides (only downstream pressure) – 2 connections							5					
Threaded gauge port on the left side (rel. to the flow direction) – Downstream pressure – 1 connection							4					
Threaded gauge port on the right side (rel. to the flow direction) – Downstream pressure – 1 connection							3					
Threaded gauge port on the left side (rel. to the flow direction) – Upstream/downstream pressure – 2 conn.							1					
Threaded gauge port on the right side (rel. to the flow direction) – Upstream/downstream pressure – 2 conn.							0					
Threaded gauge port on both sides (only downstream pressure) – 2 connections							2					
Surface finish, special services and options												
None (fine machined)								X				
Mechanical polishing								P				
Electropolishing								E				
Special features												
None									X			
Degreased for oxygen									O			
CIP / SIP lock system									C			
Pipe connections												
Clamp ferrule ASME BPE											D	
Clamp ferrule DIN (DIN32676-A)											F	
Clamp ferrule ISO (DIN32676-B)											E	
ETO according to ASME BPE											DI	
ETO according to DIN11966-A (DIN11850-2)											FI	
ETO according to ISO 1127-1											EI	
Size												
DN 32 (available with ISO connections only)											32	
1 1/2" or DN 40											40	
2" or DN 50 (not available with ISO connections)											50	
Special valves / Extras												
Full description or additional codes have to be added in case of a non standard combination												E

a) Under special request and after approval of technical solution.