

2PC Ball Valve Type II 1000WOG

Item NO. CW BV-2 II

Model: 2011

Features:

1. Pressure Rating: 1000PSI/PN63

2. Working Temperature: -20° C to +180° C

3. Full Port

4. Investment Casting

5. Blow-out Proof Stem

6. Locking Device Handle (Option)


7. PED 2014/68/EU

8. Thread: ASME B1. 20. 1

BS21, DIN2999/259, IS0228-1, IS07/1, JIS B 0203

9. Inspection Testing: API598, EN12266

PRESSURE-TEMPERATURE RATING

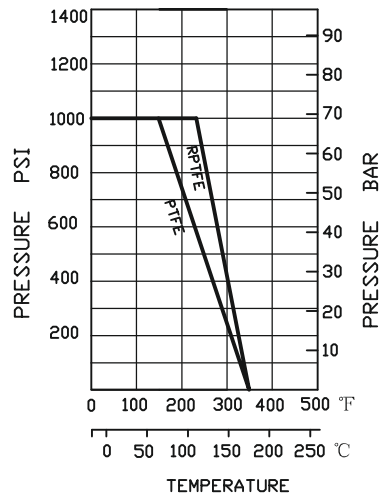

4"	96	219	171	320
3"	76	166	127	230
2-1/2"	64	144.5	118	230
2"	50	119	92.5	162
1-1/2"	38	98	77.5	140
1-1/4"	32	87	74	140
1"	25	77	62.5	112.5
3/4"	20	65	59	112.5
1/2"	15	56.5	52.5	103
3/8"	12.5	48.5	48	91.5
1/4"	11.6	48.5	48	91.5
SIZE	D	L	H	W

14	HANDLE	304	1
13	LOCK DEVICE	304	1
12	STEM	304/316	1
11	STEM NUT	304	1
10	SPRING WASHER	304	1
9	GLAND NUT	304	1
8	STEM PACKING	PTFE	1
7	THRUST WASHER	PTFE	1
6	END SEAL	PTFE	1
5	CAP	CF8/CF8M	1
4	BALL	304/316	1
3	BALL SEAT	PTFE/RPTFE	2
2	BODY	CF8/CF8M	1
1	HANDLE COVER	PLASTIC	1
NO.	NAME	MATERIAL	Q' TY


Alfacom
 אלפא קום אספקה הנדסית בע"מ
 Industrial Automation Products
 www.alfacom.co.il
 e-mail: info@alfacom.co.il