


3PC Ball Valve Threaded Type II 1000WOG  
 Item NO. CW BV-3 II  
 Model NO: 3051

Features:

1. Pressure Rating: 1000PSI/PN63
2. Working Temperature: -20° C to +180° C
3. Full Port
4. Investment Casting
5. Blow-out Proof Stem
6. Locking Device Handle (Option)
7. PED 2014/68/EU
8. Thread: ASME B1. 20. 1
- BS21, DIN2999/259, ISO228-1, IS07/1, JIS B 0203
9. Inspection Testing: API598, EN12266

17	HANDLE	304	1
16	LOCK DEVICE	304	1
15	STEM PACKING	PTFE	1
14	BALL SEAT	PTFE/RPTFE	2
13	BALL	304/316	1
12	BODY	CF8/CF8M	1
11	END CAP	CF8/CF8M	2
10	BOLT NUT	304	4-6
9	SPRING WASHER	304	4-6
8	BOLT	304	4-6
7	END SEAL	PTFE	2
6	THRUST WASHER	PTFE	1
5	GLAND NUT	304	1
4	SPRING WASHER	304	1
3	STEM NUT	304	1
2	STEM	304/316	1
1	HANDLE COVER	PLASTIC	1
NO.	NAME	MATERIAL	Q' TY

PRESSURE-TEMPERATURE RATING

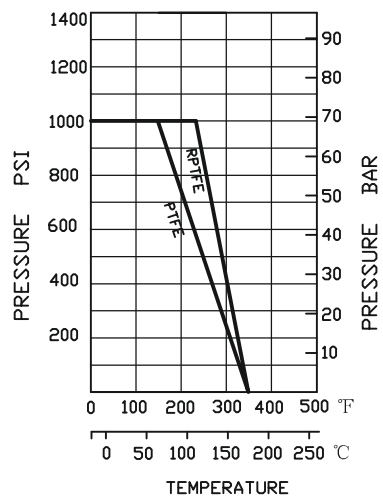

4'	96	218	176	320
3'	76	175	138.5	247
2-1/2'	64	158	129.5	247
2'	50	122	99	191.5
1-1/2'	38	100	83	155.5
1-1/4'	32	93	78.5	155.5
1'	25	80	62.5	126.5
3/4'	20	70	58.5	112.5
1/2'	15	60	53	106.5
3/8'	12.5	50	47.5	92.5
1/4'	11.6	50	47.5	92.5
SIZE	D	L	H	W

 **Alfacom**  
 אלפא קום אספקה הונדסית בע"מ  
 Industrial Automation Products  
 www.alfacom.co.il  
 e-mail: info@alfacom.co.il