


| Machining Tolerances | |
|----------------------|-----------|
| Dimension | Tolerance |
| 0.5–3 | ±0.1 |
| >3–6 | ±0.1 |
| >6–30 | ±0.1 |
| >30–120 | ±0.3 |
| >120–400 | ±0.5 |

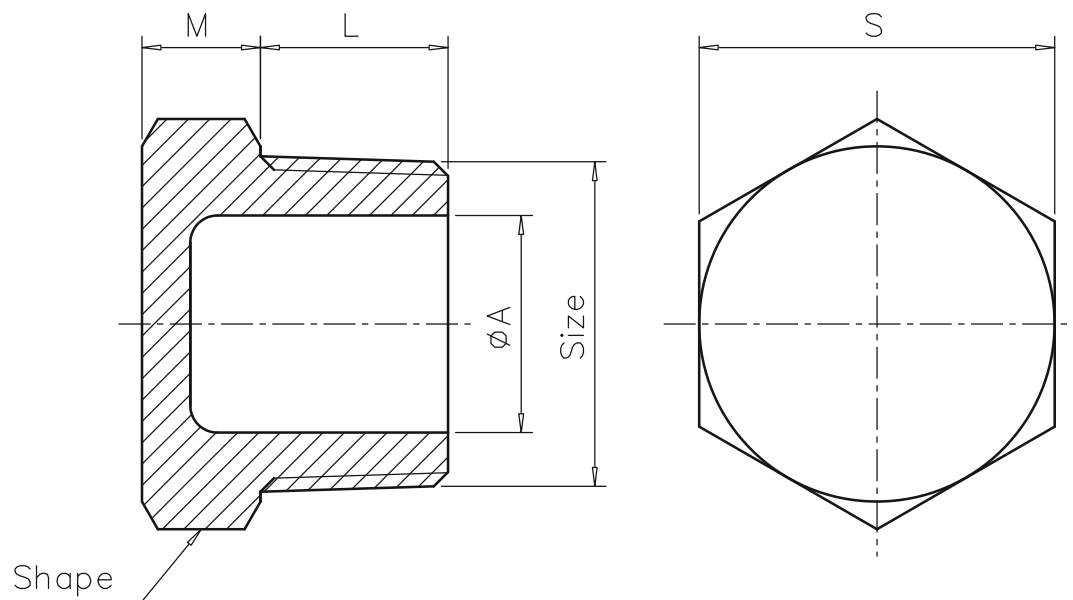

unit: mm

| Size | 1/8" | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1-1/4" | 1-1/2" | 2" | 2-1/2" | 3" | 4" |
|------|------|------|------|------|------|----|--------|--------|------|--------|------|-------|
| A | 5.5 | 8 | 11.5 | 15 | 20.5 | 26 | 34.5 | 40 | 51 | 65.5 | 77.5 | 101.5 |
| S | 12.5 | 15 | 18.5 | 22.5 | 28 | 35 | 44 | 50.5 | 62.5 | 78.5 | 92 | 118 |
| M | 4 | 4 | 5 | 5 | 5.5 | 6 | 6.5 | 6.5 | 7 | 7 | 7.5 | 8 |
| L | 8 | 10.5 | 11 | 14.5 | 15.5 | 18 | 20.5 | 20.5 | 25 | 27 | 30 | 36 |

According to ISO 4144 Fig.13 P2

Shape: 1/8"–1/2" Hexagon
 3/4"–4" Octagon



Hex Plug

304/316

Rev: 6.22.2018