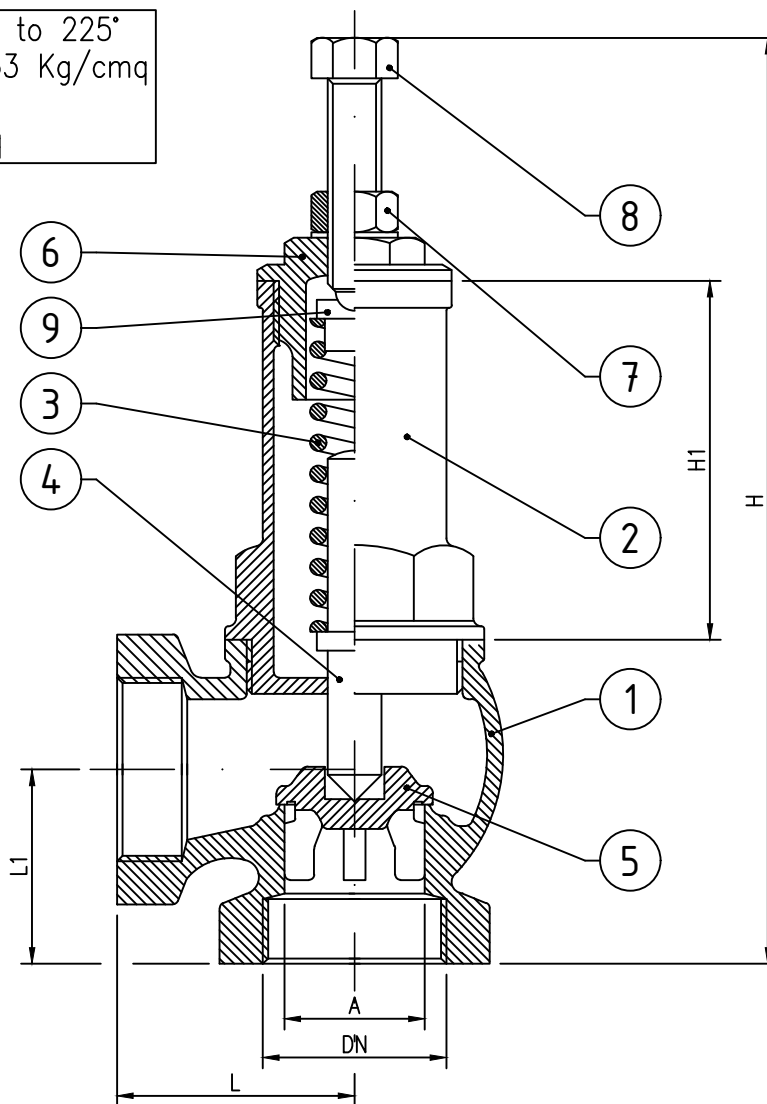






| N° | NAME | MATERIAL | | N° | NAME | MATERIAL | | N° | NAME | MATERIAL |
|----|--------|-----------------------------|------------------------------|----|------|-----------------------------|------------------------------|----|--------|--------------------------|
| 1 | BODY | BRASS-CW617N UNI EN12165 | BRONZE- CB491K UNI EN1982 | 4 | PLUG | BRASS-CW614N UNI EN12164 | | 8 | BOLT | BRASS-CW614N UNI EN12164 |
| | | at 3/8" to 2" | at 2"1/2 to 3" | 5 | DISC | BRASS-CW617N UNI EN12165 | | 9 | WASHER | BRASS-CW614N UNI EN12164 |
| 2 | BONNET | BRASS-CW617N UNI EN12165 | BRONZE- CB491K UNI EN1982 | 6 | CAP | BRASS-CW614N UNI EN12164 | BRONZE- CB491K UNI EN1982 | 10 | - | - |
| | | at 3/8" to 2" | at 2"1/2 to 3" | | | at 3/8" to 2" | at 2"1/2 to 3" | 11 | - | - |
| 3 | SPRING | CARBON STEEL C72 | | 7 | NUT | BRASS-CW614N UNI EN12164 | | 12 | - | - |

Working Temperature: -20° to 225°
Max pression against: 1.033 Kg/cm²
Setting: 1 to 12 Kg/cm²
Hydraulic Test: 25 Kg/cm²



| MARK \ Size | 3/8" | 1/2" | 3/4" | 1" | 1"1/4 | 1"1/2 | 2" | 2"1/2 | 3" |
|-------------|------|------|------|------|-------|-------|-----|-------|------|
| H mm | 118 | 125 | 149 | 165 | 195 | 212 | 238 | 305 | 335 |
| H1 mm | 45 | 45 | 56 | 63 | 78 | 87 | 92 | 100 | 113 |
| L mm | 26 | 34 | 40 | 45 | 54 | 60 | 72 | 87 | 87.5 |
| L1 mm | 23.5 | 28.5 | 31.5 | 40 | 42.5 | 47 | 60 | 74.5 | 84 |
| C mm | 10 | 13 | 19 | 25.5 | 31 | 38 | 48 | 63.5 | 77 |

| | | | | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------|------|----------|
|  CONTI RUBINETTERIE di Conti Giorgio & C. S.a.s. Via Astabbio, 5 - 13018 Valduggia TELEFONO 0163 487704 FAX 0163 48107 |  SCALA / | DISEGNATORE Simone Lanaro | MODIFICA: _____ _____ _____ |  FIRMA | DATA | |
| | | DATA 05-12-2005 | |  REV | | |
| | | RICAVATO DAL - | | APP CONT | M.V. | 05-12-05 |
| | | | | | | |
| CODICE: VSI90604 | DESCRIZIONE: SAFETY VALVE PN16 SCREWED ENDS | N° DISEGNO - | PAG. 1/1 | REV. 00 | | |
| A TERMINI DI LEGGE E' VIETATA LA RIPRODUZIONE O DIFFUSIONE DEL DISEGNO PREVIA NOSTRA AUTORIZZAZIONE. | | | | | | |