

DRAIN TAP

Threaded · PN16 / 200 PSI

Model CW DT | ALFAMATIC


FEATURES

1. Pressure: PN16 / 200 PSI
2. Temperature: -20°C to +180°C
3. Investment cast construction
4. Reduced port; blow-out proof stem
5. Threads: ISO 228-1, ISO 7-1, NPT, DIN 2999/259
6. Inspection: API 598 / EN 12266-1
7. Casting approval: AD 2000-W0



MATERIALS

Item	Description	Q'ty	Material
1	Cap	1	CF8/CF8M
2	Body	1	CF8/CF8M
3	Ball	1	304/316
4	Ball Seat	2	PTFE/RPTFE
5	Handle	1	CF8/CF8M
6	Handle Bolt	1	304
7	Spring Washer	1	304
8	Stem	1	304/316
9	O-ring	2	NBR
10	Thrust Washer	1	PTFE
11	End Seal	1	PTFE

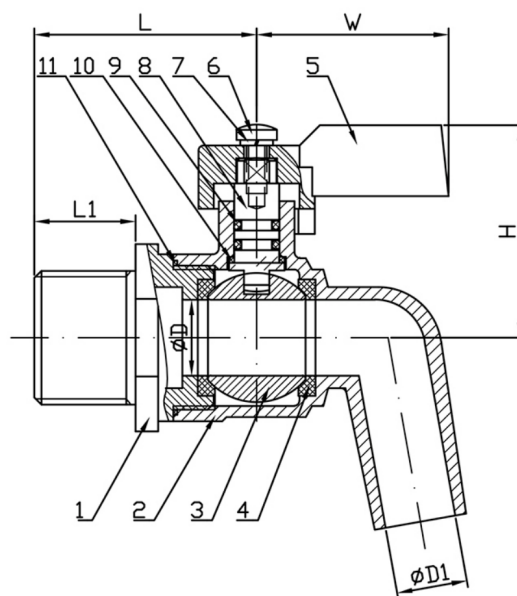

DIMENSIONS (mm)

Size	D	D1	L	W	H	L1
3/8"	10	8.6	31.5	38	38	13.6
1/2"	10	8.6	31.5	38	38	13.6
3/4"	15	14	40	38	42	16
1"	20	18.5	48	38	45	21