

SWING CHECK VALVE

Threaded · PN16 / 200 PSI


Model CW CV-S | ALFAMATIC

FEATURES

1. Pressure: PN16 / 200 PSI
2. Temperature: -20°C to +180°C
3. Investment cast construction
4. Threads: ISO 228-1, ISO 7-1, NPT, DIN 2999/259
5. Inspection: API 598 / EN 12266-1
6. Casting approval: AD 2000-W0

MATERIALS

Item	Description	Q'ty	Material
1	Body	1	CF8/CF8M/WCB
2	Disc	1	CF8/CF8M
3	Hanger Pin	1	304/316
4	Plug Gasket	1	PTFE
5	Cap	1	CF8/CF8M/WCB
6	Gasket	1	PTFE

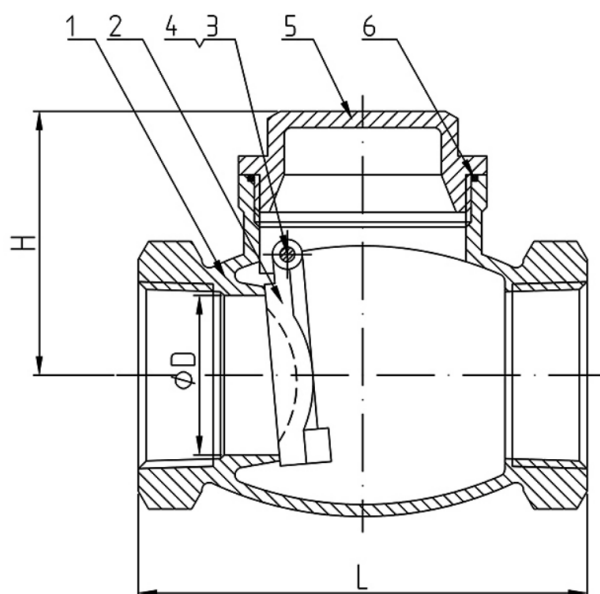

DIMENSIONS (mm)

Size	D	H	L
1/2"	15	42	64
3/4"	20	49	79
1"	24	58	87
1-1/4"	30	60	101
1-1/2"	37	71	117
2"	46	79	136
2-1/2"	63	93	163
3"	73	102	184