
TDS BLOWDOWN CONTROL VALVES
VPC26

DESCRIPTION

When a steam boiler is in operation there is continuous evaporation of boiler water which causes an undesirable increase in TDS (Total Dissolved Solids) concentration. A typical problem that results from this is water foaming, which leads to reduced boiler performance and wet steam. Furthermore, dissolved and suspended solids will carry over into the steam lines, contaminating valves, tubes, heat exchangers and steam traps, leading to corrosion, scaling and erosion. For these reasons, a certain amount of boiler water must be discharged continuously or periodically to ensure TDS concentration is kept within the recommended parameters.
The ADCATrol VPC26 is a control valve specially designed for this purpose and features a multi-stage trim to progressively reduce the energy of the fluid. This makes it ideal for discharge of boiler blowdown at high differential pressures where flashing is a concern.
The valve is suitable for both continuous and on/off TDS control via a PA series reverse action pneumatic actuator or AV series fail-safe spring return actuator.





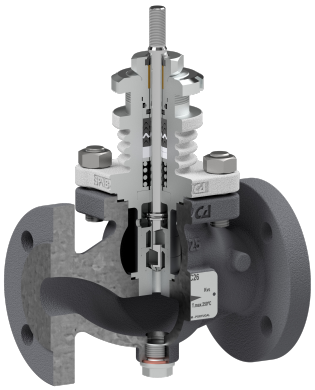

MAIN FEATURES

Minimized vibrations due to continuous stem guiding.
Seat and plug sealing surfaces are protected from erosion at low stroke positions.
Compact and modular design.
Multi stage trim for controlled velocity and pressure drop.
Hardened stainless steel trim with stellite faced plug and seat.
Tool-free quick exchangeable clamped-in seats, allowing fast and easy inline maintenance procedures.

OPTIONS AND ACCESSORIES: Sample valve bottom connection.
NV400B sample valve.
Blowdown controllers.
TDS probes.
Higher rated pressure and temperature versions on request.

USE: TDS blowdown control in steam boilers and other applications with high pressure drops and low flow rates where cavitation and flashing phenomenon are likely to occur.

AVAILABLE MODELS: VPC26S – carbon steel.
VPC26i – stainless steel.

SIZES: 1/2" to 11/2"; DN 15 to DN 40.

CONNECTIONS: Flanged EN 1092-1 PN 40.
Flanged ASME B16.5 Class 300.

AVAILABLE ACTUATORS: PA10 linear pneumatic actuator.
AVF234S linear electric actuator.


CE MARKING – GROUP 2 (PED – EUROPEAN DIRECTIVE)	
PN 40	**CATEGORY**
1/2" to 1" – DN 15 to 25	SEP
11/2" – DN 40	1 (CE marked)

We reserve the right to change the design and material of this product without notice.

BODY LIMITING CONDITIONS					
VPC26S				VPC26i	
FLANGED PN 40 *		FLANGED CLASS 300 **		FLANGED PN 40 *	
ALLOWABLE PRESSURE	RELATED TEMPERATURE	ALLOWABLE PRESSURE	RELATED TEMPERATURE	ALLOWABLE PRESSURE	RELATED TEMPERATURE
40 bar	-10 / 50 ºC	50 bar	-10 / 50 ºC	40 bar	-10 ºC / 50 ºC
33,3 bar	200 ºC	43,9 bar	200 ºC	33,7 bar	200 ºC
27,6 bar	300 ºC	36,9 bar	350 ºC	29,7 bar	300 ºC
25,7 bar	350 ºC	34,6 bar	400 ºC	28,5 bar	350 ºC
23,8 bar	400 ºC	–	–	27,4 bar	400 ºC

* Rating according to EN 1092-1:2018; ** Rating according to EN 1759-1:2004.

STEM SEALING
PTFE/GR V-RINGS (V1.2)




-10 to 250 ºC

FLOW RATE COEFFICIENTS (m³/h)				
SIZE	1/2" DN 15	3/4" DN 20	1" DN 25	11/2" DN 40
Kvs	1,2	1,2	1,2	1,8
STROKE	6			8

For conversion Kvs = Cv (US) x 0,865.


DIMENSIONS

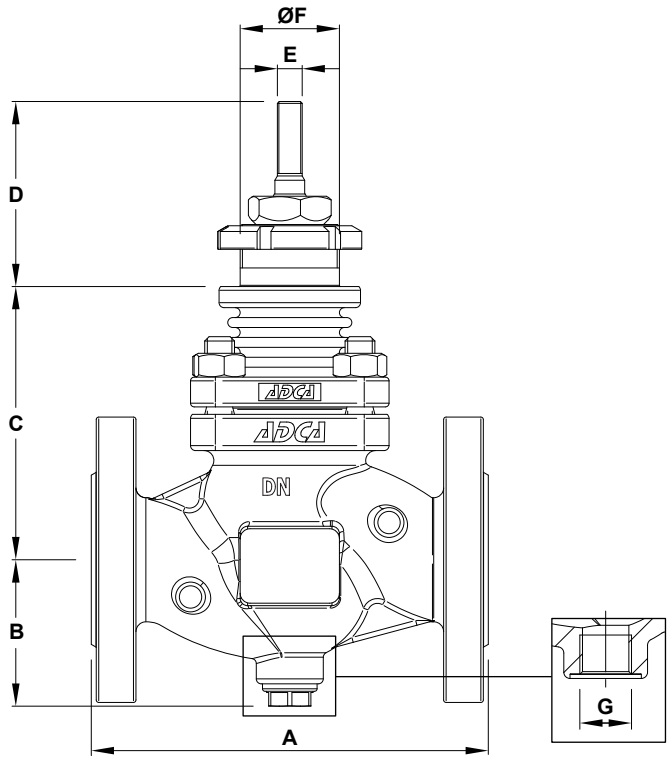


We reserve the right to change the design and material of this product without notice.

DIMENSIONS (mm)										
SIZE	EN	ASME	B	C	D	E	ØF	G **	EN	ASME
	A								WEIGHTS (kg)	
1/2" – DN 15	130	190 *	61	104	70	M10 x 1	M40 x 1,5	3/8"	5,3	5,3
3/4" – DN 20	150	194 *	61	104	70	M10 x 1	M40 x 1,5	3/8"	6,1	6,2
1" – DN 25	160	197	61	109	70	M10 x 1	M40 x 1,5	3/8"	6,9	6,9
11/2" – DN 40	200	235	75	193	70	M10 x 1	M40 x 1,5	3/8"	12,6	13,8


* With welded-on flanges.
** As standard, in versions with EN flanges, this connection is female threaded ISO 228. In versions with ASME flanges, this connection is female threaded NPT.

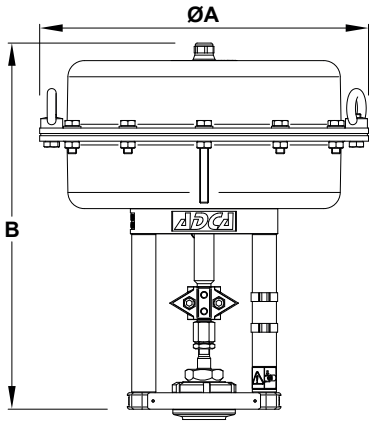

PA

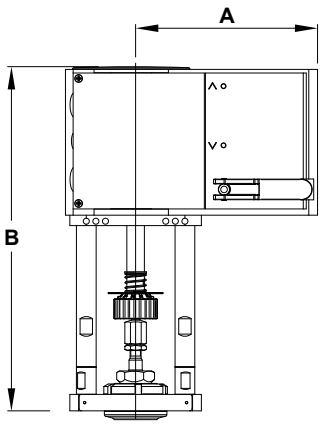

AV

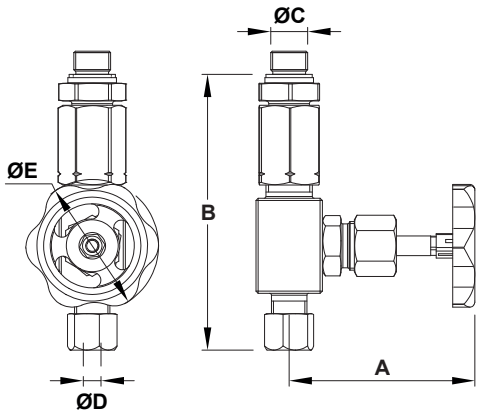

NV400B

DIMENSIONS – PA SERIES PNEUMATIC ACTUATORS (mm)	
DIMENSION	PA10
ØA	170
B	251
WEIGHT (kg)	6,3

For more information, please consult IS PA.010 – PA Linear pneumatic actuators.


DIMENSIONS – AV SERIES ELECTRIC ACTUATORS (mm)	
DIMENSION	AVF234S
A	166
B	314
WEIGHT (kg)	4,1


For more information, please consult IS AVM.010 – AVM234S-AVF234S Linear electric actuators.

DIMENSIONS – NV400B SAMPLE VALVES (mm)	
DIMENSION	NV400B
A	90 (maximum)
B	125
ØC	3/8"
ØD	8
ØE	60
WEIGHT (kg)	0,63

For more information, please consult IS NV400.008 – NV400 Needle valves.

We reserve the right to change the design and material of this product without notice.

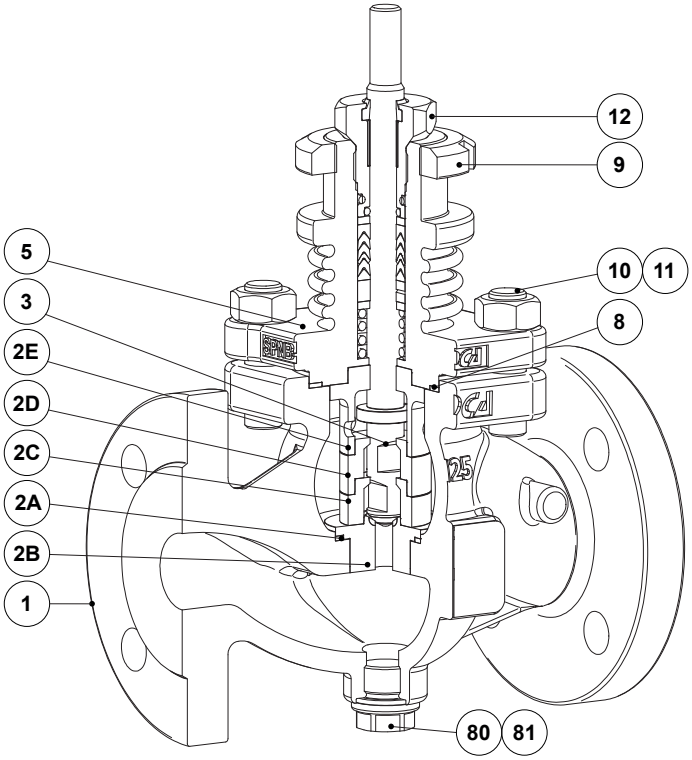

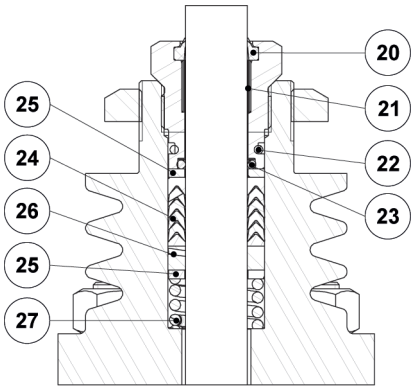

PTFE/GR V-Rings (V1.2)

MATERIALS		
POS. No.	**DESIGNATION**	**MATERIAL**
1	Valve body (VPC26S)	A216 WCB / 1.0619
	Valve body (VPC26i)	A351 CF8M / 1.4408
2A	* Seat gasket	Stainless steel / Graphite
2B	* Seat	AISI 316L / 1.4404 stellite faced
2C	Lower guide sleeve	Hardened stainless steel
2D	Intermediate guide sleeve	Hardened stainless steel
2E	Upper guide sleeve	Hardened stainless steel
3	* Valve plug	AISI 316L / 1.4404 stellite faced
5	Bonnet	A351 CF8 / 1.4308
8	* Gasket	Stainless steel / Graphite
9	Actuator lock nut	A351 CF8 / 1.4308
10	Nut (VPC26S)	EN 10269 steel
	Nut (VPC26i)	Stainless steel A2-70
11	Stud (VPC26S)	EN 10269 steel
	Stud (VPC26i)	Stainless steel A2-70
12	Packing nut	AISI 303 / 1.4305
20	* Scraper ring	FPM; NBR
21	* Plain bearing	Bronze / PTFE
22	* O-ring	EPDM
23	* O-ring	FPM
24	* Chevron packing set	PTFE; Graphite filled PTFE
25	Washer	AISI 304 / 1.4301
26	Stem guide	Stainless steel filled PTFE
27	* Spring	AISI 302 / 1.4300
80	* Gasket	Copper
81	Plug	AISI 316 / 1.4401

* Available spare parts.

We reserve the right to change the design and material of this product without notice.

ORDERING CODES VPC26 (a)									
VALVE MODEL	**VPC26**	**1**	**S**	**XX**	**1**	**A3**	**N**	**15**	
TDS blowdown control valve, two way, straight body	**VPC26**								
VALVE SERIES									
Series 1		**1**							
BODY MATERIAL									
A216 WCB / 1.0619 carbon steel			**S**						
A351 CF8M / 1.4408 stainless steel			**I**						
VERSIONS									
Valve without sample valve bottom connection				**XX**					
Valve with sample valve bottom connection and plug				**BX**					
STEM SEALING									
PTFE/GR V-Rings (V1.2)					**1**				
FLOW RATE COEFFICIENT									
Kvs 1,2 (available only for 1/2" to 1" and DN 15 to DN 25)						**A3**			
Kvs 1,8 (available only for 11/2" and DN 40)						**A4**			
PIPE CONNECTIONS									
Flanged EN 1092-1 PN 40							**N**		
Flanged ASME B16.5 Class 300							**V**		
SIZE									
1/2" or DN 15								**15**	
3/4" or DN 20								**20**	
1" or DN 25								**25**	
11/2" or DN 40								**40**	
SPECIAL CONSTRUCTION / ADDITIONAL OPTIONS									
A full description must to be provided and validated in case of a non-standard construction									**E**

(a) Codification for valve only. For actuator codes, refer to the appropriate information sheet.

We reserve the right to change the design and material of this product without notice.