


PRESSURE-TEMPERATURE RATING

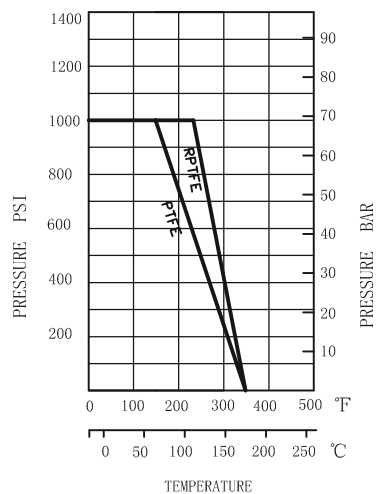

| SIZE   | d    | L    | W   | H    |
|--------|------|------|-----|------|
| 2"     | 32   | 99   | 155 | 64.5 |
| 1-1/2" | 25   | 83   | 155 | 58.5 |
| 1-1/4" | 20   | 78   | 110 | 52   |
| 1"     | 15   | 71   | 110 | 47   |
| 3/4"   | 12.5 | 59   | 110 | 40   |
| 1/2"   | 9.2  | 56.5 | 110 | 38.5 |
| 3/8"   | 7    | 44   | 88  | 31   |
| 1/4"   | 5    | 39   | 65  | 28.5 |

1PC Ball Valve 1000WOG

Item NO. CW BV-1

Model NO: 1011

Features:

1. Pressure Rating: 1000PSI/PN63
2. Working Temperature: -20° C to +180° C
3. Reduce Port
4. Investment Casting
5. Blow-out Proof Stem
6. Locking Device Handle (Option)
7. PED 2014/68/EU
8. Thread: ASME B1.20.1  
BS21, DIN2999/259, ISO228-1, ISO7/1, JIS B 0203
9. Inspection Testing: API598, EN12266

| NO. | NAME          | MATERIAL   | Q' TY |
|-----|---------------|------------|-------|
| 14  | CAP           | CF8/CF8M   | 1     |
| 13  | STEM SEAL     | PTFE       | 1     |
| 12  | STEM PACKING  | PTFE       | 1     |
| 11  | STEM WASHER   | 304        | 1     |
| 10  | SPRING WASHER | 304        | 1     |
| 9   | STEM NUT      | 304        | 1     |
| 8   | STEM          | 304/316    | 1     |
| 7   | LOCK DEVICE   | 304        | 1     |
| 6   | HANDLE        | 304        | 1     |
| 5   | HANDLE COVER  | PLASTIC    | 1     |
| 4   | SEAT          | PTFE/RPTFE | 1     |
| 3   | BODY          | CF8/CF8M   | 1     |
| 2   | BALL          | 304/316    | 1     |
| 1   | JOINT GASKET  | PTFE/RPTFE | 1     |

